

# AERO

## CLASSIC MODELS

### Features



- Wall and ceiling mounting.
- **Blauberg Aero Bivolt** series models are equipped with specially designed motors compatible with both 127 V and 220 V power mains.
- Easy maintenance.
- Continuous operation.
- Backdraft damper.
- Ball bearing motor.
- Available in chrome (Aero Chrome) and gold (Aero Gold) decorations.
- 5 year warranty.



**Air flow:**  
up to 309 m<sup>3</sup>/h  
86 l/s



**Power:**  
from 14 W  
**SFP:**  
from 0.28 W/l/s



**Noise level:**  
from 38 dBA



Gold



Chrome



Vintage


### Options




Model	Aero 100/125/150				
	S	T	ST	H	SH
Pull-cord switch	•		•		•
Timer		•	•	•	•
Humidity sensor				•	•

- Turn-off delay adjustable from 2 to 30 min.
- Humidity setpoint adjustable from 60 % up to 90 %.

### Overall dimensions and mounting

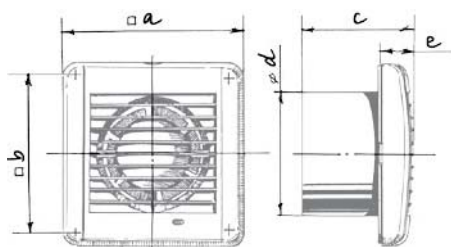

Dimensions [mm]	a	b	c	∅ d	e
Aero 100	144	122	92.5	100	29.5
Aero 125	168	144	97	125	30
Aero 150	198	170	119	150	30

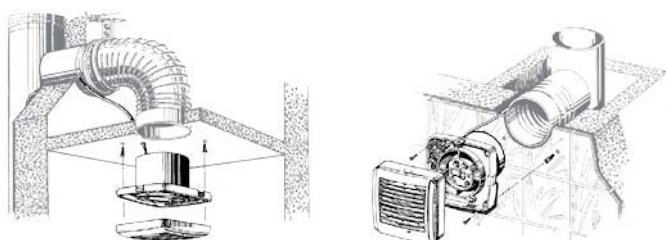


#### Designation key


Aero	Gold	100	S	Bivolt
Model	Color	Spigot diameter	Option	Voltage

### Technical data

Model	Aero 100	Aero 125	Aero 150
Voltage [V/Hz]	220-240/50	220-240/50	220-240/50
Power [W]	14	16	24
Current [A]	0.085	0.1	0.13
RPM [min <sup>-1</sup> ]	2300	2400	2400
Air flow [m <sup>3</sup> /h (l/s)]	102 (28)	193 (54)	309 (86)
SFP [W/l/s]	0.49	0.3	0.28
Noise level [dBA]	38	39	40

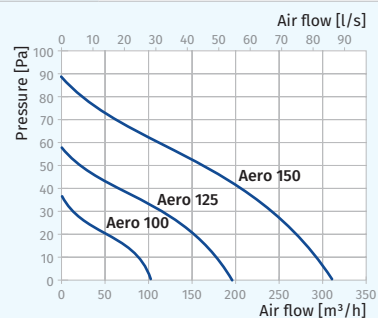

Model	Aero 100 Bivolt	Aero 125 Bivolt	Aero 150 Bivolt
Voltage [V/Hz]	127/60 220/60	127/60 220/60	127/60 220/60
Power [W]	10 9	16 15	25 25
Current [A]	0.115 0.054	0.119 0.102	0.175 0.338
RPM [min <sup>-1</sup> ]	2500 2500	2400 2400	2350 2350
Air flow [m <sup>3</sup> /h (l/s)]	92 (26) 92 (26)	190 (53) 190 (53)	270 (75) 270 (75)
SFP [W/l/s]	0.39 0.35	0.30 0.28	0.33 0.33
Noise level [dBA]	34 34	36 36	39 39



### Accessories

#### Duct system



BlauPlast

#### Flexible air ducts



BlauFlex

#### Grilles and hoods



Decor, GM

#### Speed controllers



CDT E1.8

MCD 60/0.3

#### Clamps



K, KZ