

GLORY

WITH DECORATIVE FRONT PANEL AND LIGHTING

Features



- o Wall mounting
- o Easy maintenance
- o Low-noise impeller
- o Continuous operation
- o Ball bearing motor
- o Glass front cover
- o Built-in 2 W LED-lamp
- o 5 year warranty



Air flow:
up to 258 m³/h
72 l/s



Power:
from 14 W
SFP:
from 0.33 W/l/s



Noise level:
from 33 dBA




Options



Model	Glory 100/125/150	
Option	T	H
Timer	•	•
Humidity sensor		•

- o Turn-off delay adjustable from 2 to 30 min.
- o Humidity setpoint adjustable from 60 % up to 90 %.

Overall dimensions

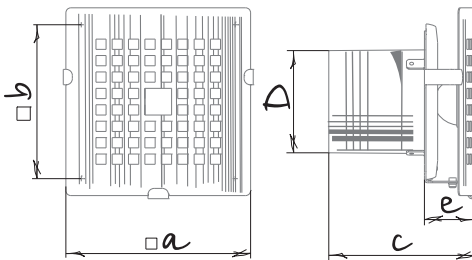


Dimensions [mm]	a	b	c	Ø D	e
Glory 100	180	120	143	100	49
Glory 100 T	183	122	151.6	98	65
Glory 100 H	183	122	151.6	98	65
Glory 125	204	140	152	125	55
Glory 150	230	165	169	150	53

Designation key			
Glory	- 1	125	H
Model	Decorative panel	Spigot diameter	Option

Technical data

Model	Glory 100	Glory 125	Glory 150
Voltage [V/Hz]	220-240/50	220-240/50	220-240/50
Power [W]	14	16	24
Current [A]	0.085	0.1	0.13
RPM [min ⁻¹]	2300	2400	2400
Air flow [m ³ /h (l/s)]	89 (25)	164 (46)	258 (72)
SFP [W/l/s]	0.57	0.35	0.33
Noise level [dBA]	33	34	37



Decorative panels



Glory - 1



Glory - 2



Glory - 3



Glory - 4



Glory - 5



Glory - 6

Accessories

Duct system	Flexible air ducts	Grilles and hoods	Speed controllers	Clamps
BlauPlast	BlauFlex	Decor, GM	CDT E1.8 MCD 60/0.3	K, KZ