

ICE

WITH DECORATIVE FRONT PANEL

Features



- Wall mounting
- Easy maintenance
- Low-noise impeller
- Continuous operation
- Ball bearing motor
- Glass front cover
- 5 year warranty



Air flow:
up to 298 m³/h
83 l/s




Power:
from 14 W
SFP:
from 0.29 W/l/s



Noise level:
from 37 dBA




Overall dimensions

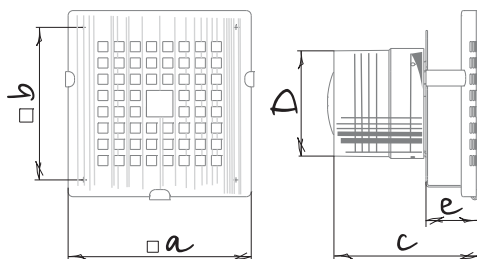

Dimensions [mm]	a	b	c	Ø D	e
Ice 100	183	120	151	100	58
Ice 125	205	140	156	125	58
Ice 150	233	165	173	150	58

Technical data

Model	Ice 100	Ice 125	Ice 150
Voltage [V/Hz]	220-240/50	220-240/50	220-240/50
Power [W]	14	16	24
Current [A]	0.085	0.1	0.13
RPM [min ⁻¹]	2300	2400	2400
Air flow [m ³ /h (l/s)]	105 (29)	185 (51)	298 (83)
SFP [W/l/s]	0.48	0.31	0.29
Noise level [dBA]	37	38	40



Decorative panels



Ice - 1



Ice - 2



Ice - 3



Ice - 4



Ice - 5



Ice - 6

Designation key

Ice	- 1	100
Model	Panel design	Spigot diameter

Accessories

Duct system



BlauPlast

Flexible air ducts



BlauFlex

Grilles and hoods



Decor, GM

Speed controllers



CDT E1.8

MCD 60/0.3

Clamps



K, KZ