

LINE

CLASSIC MODELS

Features



- For exhaust ventilation of residential premises
- Wall surface or ceiling mounting
- Low-noise impeller
- Easy maintenance
- Continuous operation
- Backdraft damper
- Ball bearing motor



Air flow:
up to 292 m³/h
81 l/s



Power:
from 14 W
SFP:
from 0.3 W/l/s



Noise level:
from 34 dBA



Options




Model	Line 100/125/150				
	S	T	ST	H	SH
Option					
Pull-cord switch	•		•		•
Timer		•	•	•	•
Humidity sensor				•	•

- Turn-off delay adjustable from 2 to 30 min.
- Humidity setpoint adjustable from 60 % up to 90 %.


Technical data

Model	Line 100	Line 125	Line 150
Voltage [V/Hz]	220-240/50	220-240/50	220-240/50
Power [W]	14	16	24
Current [A]	0.085	0.1	0.13
RPM [min ⁻¹]	2300	2400	2400
Air flow [m ³ /h (l/s)]	95 (26)	180 (50)	292 (81)
SFP [W/l/s]	0.53	0.32	0.3
Noise level [dBA]	34	35	38

Overall dimensions and mounting

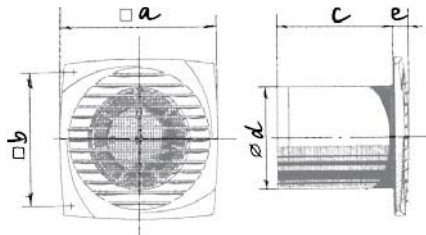


Dimensions [mm]	a	b	c	∅ d	e
Line 100	150	120	108.5	100	12.5
Line 125	176	140	114	125	12.5
Line 150	205	165	132	150	13



Designation key

Line	100	S
Model	Spigot diameter	Option

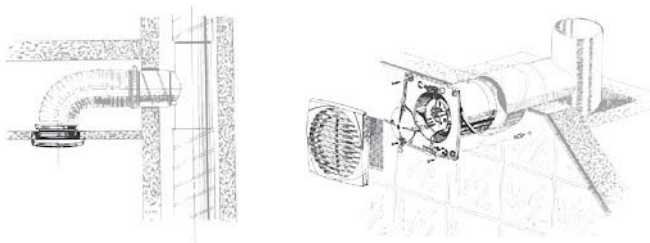

Accessories

Duct system



BlauPlast

Flexible air ducts



BlauFlex

Grilles and hoods



Decor, GM

Speed controllers



CDT E1.8

MCD 60/0.3

Clamps



K, KZ