

SLIM LINE



Bravo 100
Bravo 125
Bravo 150



Bravo
Chrome



Bravo
Platinum

■ Use

- Extract fans

■ Application

- Residential premises
- Flats, cottages
- Offices
- Utility spaces
- Trade premises
- Restaurants
- Health care facilities
- Child care facilities

■ Options

Pull-cord switch

Pull-cord switch

Timer


- Turn-off delay adjustable from 2 to 30 min

Humidity sensor

- Humidity setpoint adjustable from 60 % up to 90 %.
- Turn-off delay adjustable from 2 to 30 min

Motion sensor

- Detection range from 1 up to 4 m.
- Detection angle up to 100°.
- Turn-off delay adjustable from 2 to 30 min.

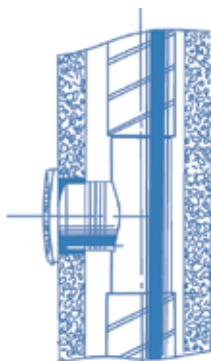


■ Features

- Wall and ceiling mounting
- Blauberg Bravo Bivolt series models are equipped with specially designed motors compatible with both 127 V and 220 V power mains
- Easy maintenance
- Continuous operation
- Backdraft damper
- Ball bearing motor
- Available in chrome (Bravo Chrome) and platinum (Bravo Platinum) decorations
- 5 year warranty


Model	Pull-cord switch	Turn-off delay timer	Humidity sensor	Motion sensor
Bravo 100				
100 S	●			
100 T		●		
100 ST	●	●		
100 H		●	●	
100 SH	●	●	●	
100 IR		●		○
Bravo 125				
125 S	●			
125 T		●		
125 ST	●	●		
125 H		●	●	
125 SH	●	●	●	
125 IR		●		○
Bravo 150				
150 S	●			
150 T		●		
150 ST	●	●		
150 H		●	●	
150 SH	●	●	●	
150 IR		●		○

Overall and mounting dimensions

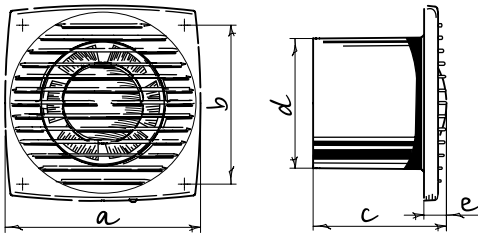


Model	Dimensions [mm]				
	a	b	c	d	e
Bravo 100	150	122	102	100	17
Bravo 125	176	144	104	125	17
Bravo 150	205	174	124	150	19

Technical data

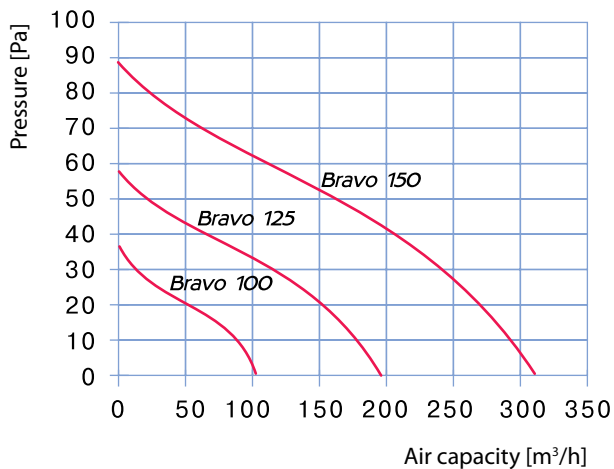

Parameters	Bravo 100	Bravo 125	Bravo 150
Voltage [V]	220-240	220-240	220-240
Power [W]	14	16	24
Air capacity [m ³ /h]	101	192	305
Sound pressure level at 3 m [dB(A)]	35	37	39
RPM [min ⁻¹]	2300	2400	2400

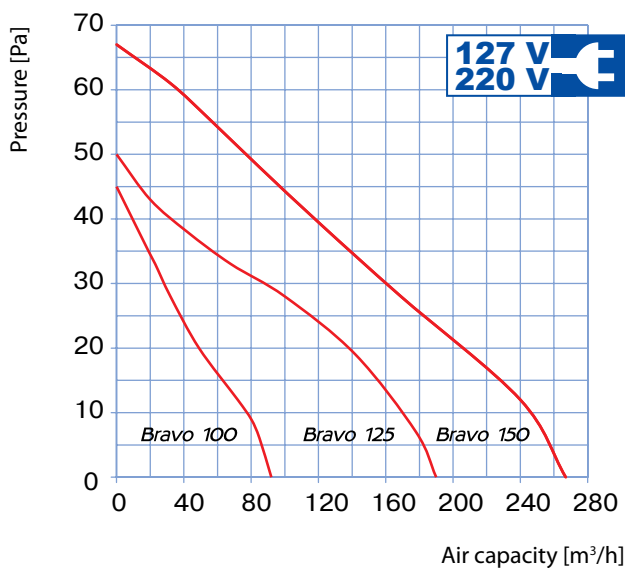

Parameters	Bravo 100 Bivolt		Bravo 125 Bivolt		Bravo 150 Bivolt	
	127	220	127	220	127	220
Voltage [V]	127	220	127	220	127	220
Frequency [Hz]	60		60		60	
Power [W]	10	9	16	15	25	25
Current [A]	0.115	0.054	0.119	0.102	0.175	0.338
RPM [min ⁻¹]	2500		2400		2350	
Air capacity [m ³ /h]	91		189		266	
Sound pressure level at 3 m [dB(A)]	33		34		38	
IP	34		34		34	



Packing

