

# TUBO

## IN-LINE FANS

### Features



- o Duct mounting
- o Easy maintenance
- o Low-noise impeller
- o Continuous operation
- o Ball bearing motor
- o 5 year warranty



**Air flow:**  
up to 295 m<sup>3</sup>/h  
82 l/s



**Power:**  
from 16 W  
**SFP:**  
from 0.35 W/l/s



**Noise level:**  
from 38 dB(A)




### Options




|        |                  |
|--------|------------------|
| Model  | Tubo 100/125/150 |
| Option | T                |
| Timer  | •                |

- o Turn-off delay adjustable from 2 to 30 min.

### Overall dimensions and mounting

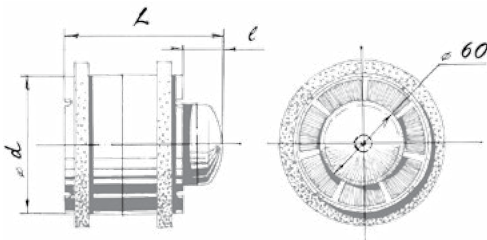

| Dimensions [mm] | d   | L   | l  |
|-----------------|-----|-----|----|
| Tubo 100        | 98  | 115 | 30 |
| Tubo 125        | 123 | 115 | 30 |
| Tubo 150        | 148 | 135 | 30 |

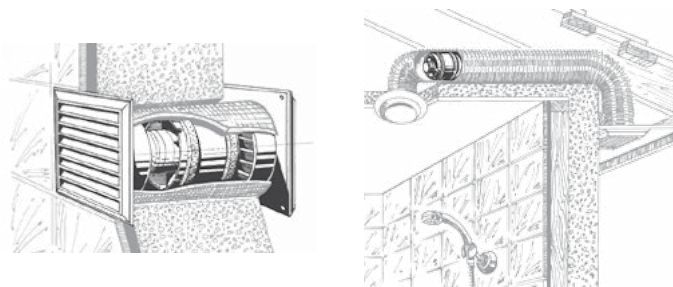


### Designation key

|       |                |                 |        |
|-------|----------------|-----------------|--------|
| Tubo  | -U             | 125             | T      |
| Model | Fixing bracket | Spigot diameter | Option |

### Technical data

| Model                              | Tubo 100   | Tubo 125   | Tubo 150   |
|------------------------------------|------------|------------|------------|
| Voltage [V/Hz]                     | 220-240/50 | 220-240/50 | 220-240/50 |
| Power [W]                          | 16         | 22         | 29         |
| Current [A]                        | 0.085      | 0.1        | 0.13       |
| RPM [min <sup>-1</sup> ]           | 2300       | 2400       | 2400       |
| Air flow [m <sup>3</sup> /h (l/s)] | 102 (28)   | 195 (54)   | 295 (82)   |
| SFP [W/l/s]                        | 0.56       | 0.41       | 0.35       |
| Noise level [dB(A)]                | 38         | 39         | 40         |



### Fixing bracket

Fan with a mounting bracket for mounting to a horizontal or vertical surface.



Tubo-U

### Accessories

| Air disc valves | Duct system | Flexible air ducts | Grilles and hoods | Speed controllers      | Clamps K, KZ |
|-----------------|-------------|--------------------|-------------------|------------------------|--------------|
|                 |             |                    |                   |                        |              |
| VPR, VSR, VMR   | BlauPlast   | BlauFlex           | Decor, GM         | CDT E1.8<br>MCD 60/0.3 | K, KZ        |