

VENTO EXPERT A50-1 S10 PRO

HEAT RECOVERY SINGLE-ROOM UNITS

Features

- Arrangement of efficient energy-saving supply and exhaust single-room ventilation in flats, houses, cottages, social and commercial premises.
- Reducing heat losses caused by ventilation due to heat recovery.
- Humidity balance and regulated air exchange create individually controlled microclimate.
- Coordinated network based on several integrated single-room ventilation units with central control.



Air flow:
up to 50 m³/h
14 l/s



Heat recovery efficiency:
up to 93 %




Power: from 3.61 W
SFP: from 0.75 W/l/s



Noise level:
from 11 dBA



Design

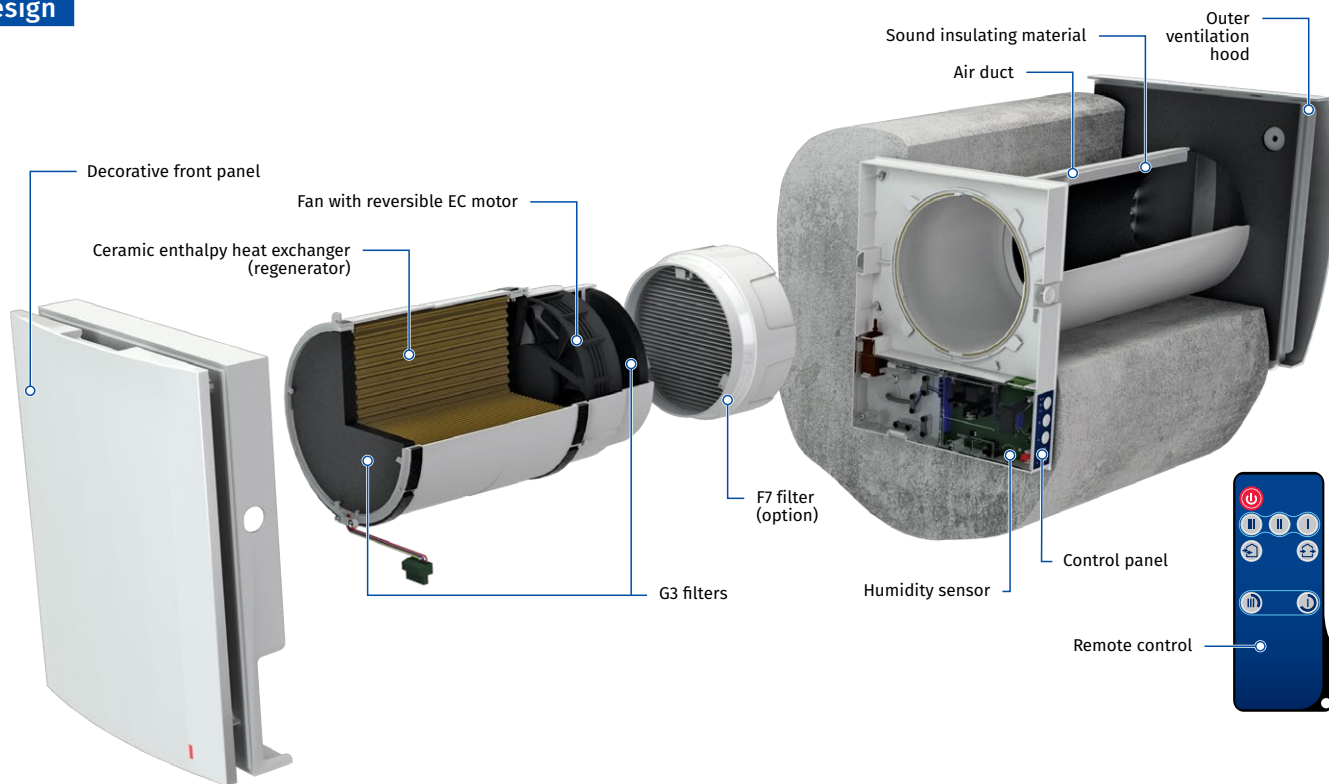

Easy maintenance.
Indoor unit is opened by pressing the latches on both sides



One of the best regeneration efficiency on the market due to innovative hexagonal structure of the heat exchanger cells



Integrated automatic air shutters prevent air back drafting



The specially designed front panel can be closed manually to ensure 100 % air tightness and protect against wind impact

Designation key


Model	Air duct	Rated air flow [m ³ /h]	Front panel	Ventilation hood type	Control
Vento Expert	A: round air duct	50	-1: flat front panel	S10: white plastic hood AH-10 white 160 (for standard walls) S: metal hood for thin walls	Pro: control with touch buttons and a remote control

VENTO EXPERT A50-1 S10 PRO

HEAT RECOVERY SINGLE-ROOM UNITS

Heat and humidity regeneration


UNIT OPERATING LOGIC IN WINTER PERIOD

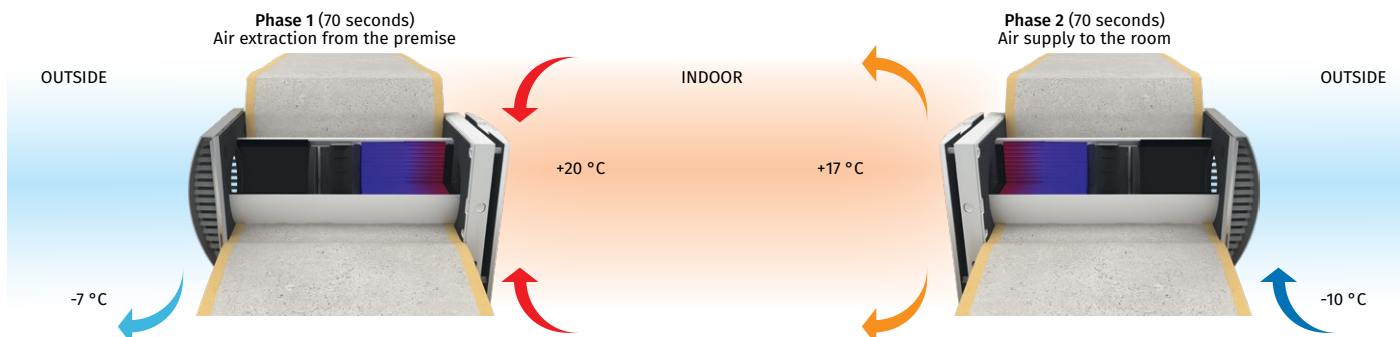

- Warm stale air is extracted from the premise, flows through the ceramic regenerator and transfers its heat energy and moisture to it.
- As the ceramic regenerator gets warmed up, the unit switches to the supply mode.
- Clean cold intake air flows through the regenerator and absorbs accumulated heat and humidity.
- When the ceramic regenerator is cooled down, the unit switches to the extract air mode.

Control


- Control of the unit operation mode is performed by means of sensor control panel located on the unit casing or a remote controller.

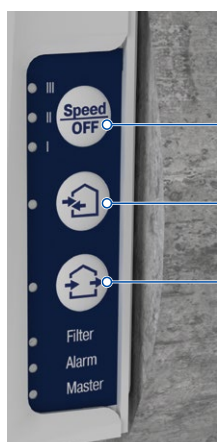

Speed selection and OFF button

Heat regeneration mode

Ventilation mode

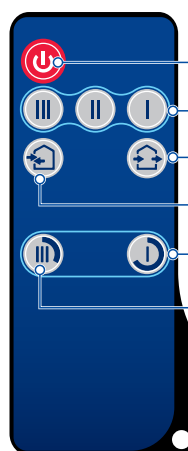

ON/OFF button

3 unit speeds

Ventilation mode


Heat regeneration mode

Night timer: low speed for 8 hours

Party timer: high speed for 4 hours

Vento Expert is equipped with a humidity sensor for indoor humidity control. If humidity increases above a set point, the unit boosts to the speed III.

Vento Expert either can operate as independent unit or can be connected with other units in a house and controlled with a master unit. In this case, only the master unit receives a signal from the remote control.

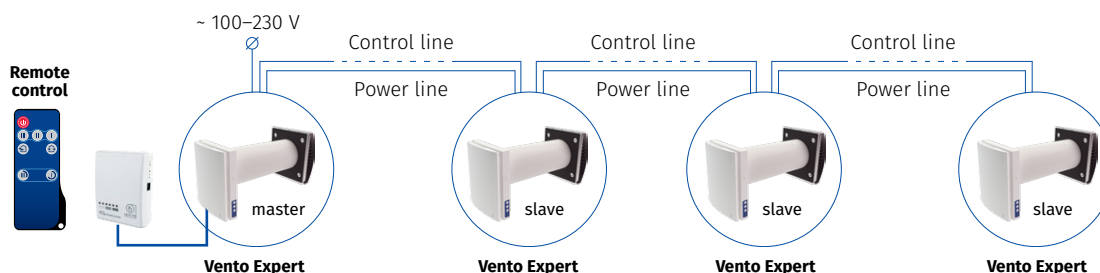


VENTO EXPERT A50-1 S10 PRO

HEAT RECOVERY SINGLE-ROOM UNITS

Mounting

- The unit is designed for through-the-wall installation inside a prepared hole in an outer wall of the building.
- The best ventilation solution is pairwise installation of reverse phase connected units. Some units ensure supply of fresh air to the room and the other units extract air from the premise. This way the most efficient balanced ventilation is arranged.
- In case of brand new construction, units are mounted in two stages:
 - **Pre-installation** at the stage of the indoor finishing and outer decorative wall finishing. It includes installation of an air duct, an outer ventilation hood and cable installation.
 - **Final mounting** before commissioning of a house. It includes installation of a regenerator with a fan and filters and mounting and wiring of an indoor unit with a controller and shutters.

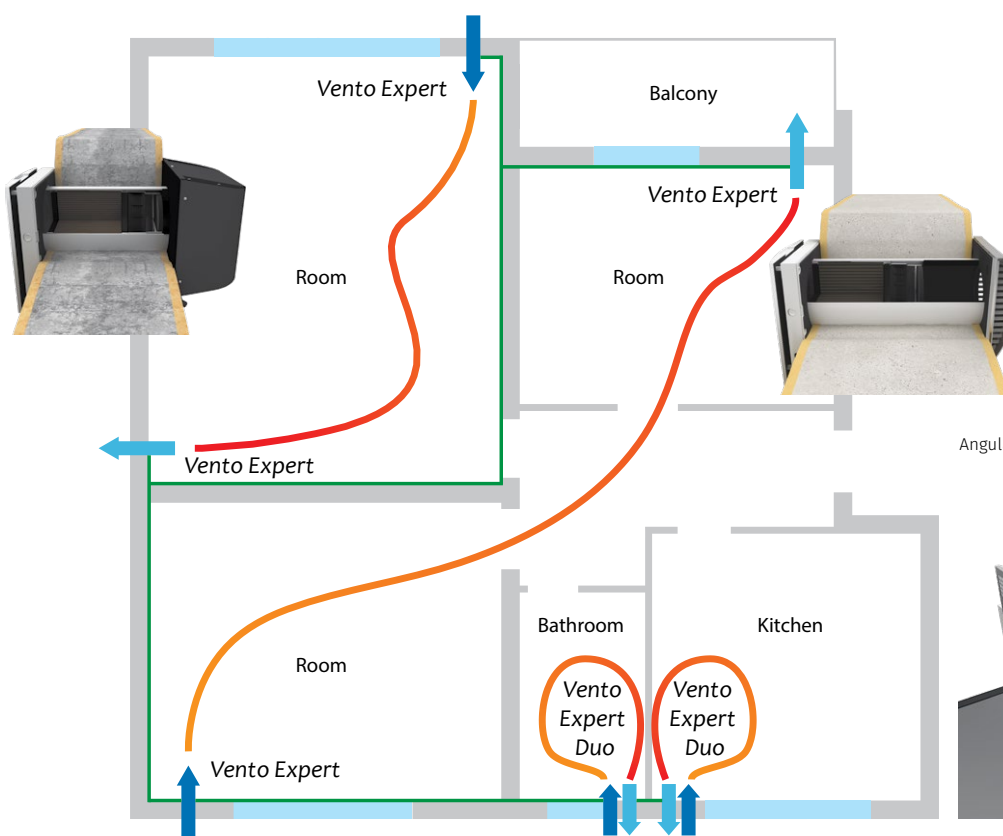

Angular mounting into a wall with standard thickness using
KIT BlauPlast white 160 / KIT BlauPlast chrome 160




VENTO EXPERT A50-1 S10 PRO

HEAT RECOVERY SINGLE-ROOM UNITS


Technical data

Parameters	Vento Expert A50-1 S10 Pro		
Speed	I	II	III
Voltage [V / 50 (60) Hz]	100–240		
Power [W]	3.61	4.15	5.20
Current [A]	0.025	0.030	0.039
RPM [min ⁻¹]	800	1300	1900
Air flow in ventilation mode [m³/h (l/s)]	15 (4)	30 (8)	50 (14)
Air flow in heat recovery mode [m³/h (l/s)]	8 (2)	15 (4)	25 (7)
SFP [W/l/s]	1.73	1.00	0.75
Filter	G3 (Option: F7 PM2.5 > 99 %*)		
Transported air temperature [°C]	-20...+40		
Sound pressure level at 1 m [dBA]	20	27	30
Sound pressure level at 3 m [dBA]	11	18	21
Outdoor sound pressure attenuation [dBA] in accordance with DIN EN 20140	42		
Indoor/outdoor airtightness classification of the complete unit in accordance with EN 13141-8	D1		
Heat recovery efficiency according to DIBt LÜ-A 20 [%]	up to 93		
Ingress Protection Rating	IP24		


* maximum air flow 40 m³/h

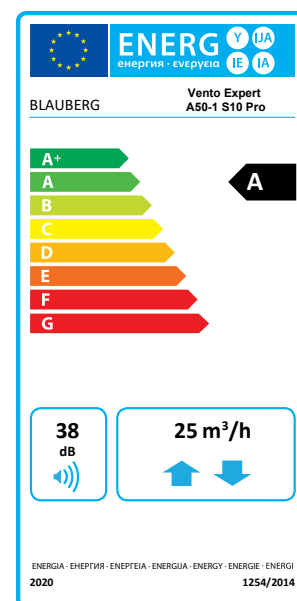

Overall dimensions [mm]

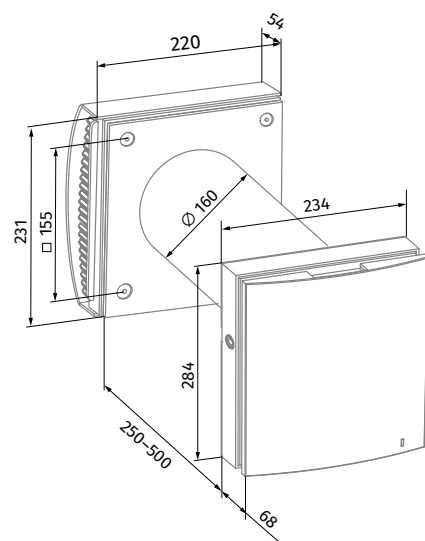



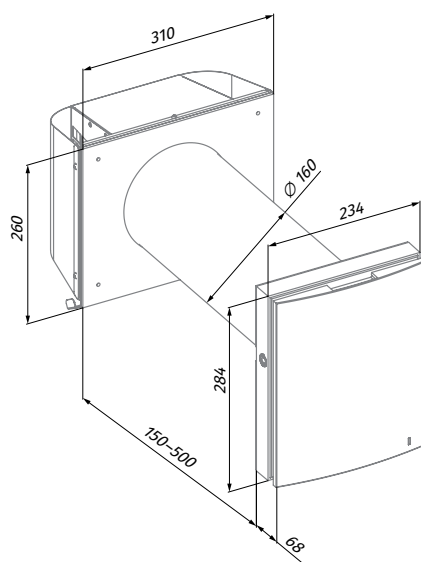






















Vento Expert A50-1 S10 Pro


Vento Expert A50-1 S Pro
(for thin walls)

VENTO EXPERT A50-1 S10 PRO







HEAT RECOVERY SINGLE-ROOM UNITS

Accessories

Name		Description
Pre-installation Kit Vento Expert A50-1 S10		Pre-installation kit for mounting into a wall with standard thickness. Includes: <ul style="list-style-type: none"> • Air duct • AH 160 outer ventilation hood • Plastic foam plug • Plastic foam wedges
Pre-installation Kit Vento Expert A50-1 S		Pre-installation kit for mounting into a thin wall. Includes: <ul style="list-style-type: none"> • Air duct • AH-S chrome 160 outer ventilation hood • Plastic foam plug • Plastic foam wedges
Completion Kit Vento Expert A50-1		Final mounting kit. Includes: <ul style="list-style-type: none"> • Cartridge with a heat regenerator, a fan and G3 filters • Indoor unit with a controller and shutters • Remote control
ZL1 Vento 160/150		Cartridge with heat regenerator for cold climate
FP Vento Expert A50 G3		G3 filters (2 pcs.)
FP Vento Expert A50 F7		Includes: <ul style="list-style-type: none"> • Plastic frame (1 pc.) • G2 pre-filter (1 pc.) • F7 filter (1 pc.). Filtration rate PM2.5 > 99 % F7 filter reduces airflow of the unit down to 40 m³/h
AH-8 white 160		White painted aluminium outer ventilation hood with frost protection for a cold climate
AH-8 chrome 160		Brushed stainless steel outer ventilation hood with frost protection for a cold climate
AH-10 *colour* 160		Plastic outer ventilation hood. Available in colours: <div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> </div> white black grey terracotta brown vintage
AH-10 chrome 160		Plastic outer ventilation hood with a plate with brushed stainless steel effect finish
AH-11 *colour* 160		Plastic outer ventilation hood. Available in colours: <div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> </div> white black grey terracotta brown vintage
AH-S chrome 160		Outer ventilation hood for thin wall made of brushed stainless steel
AH-S grey 160		Outer ventilation hood for thin wall, painted grey

VENTO EXPERT A50-1 S10 PRO

HEAT RECOVERY SINGLE-ROOM UNITS

Name		Description
PP 160/0.5		Outer plastic ventilation hood for mounting from inside
KIT BlauPlast white 160		Kit for angular mounting with white color grille (for walls with standard thickness)
KIT BlauPlast chrome 160		Kit for angular mounting with stainless steel outer grille (for walls with standard thickness)
FB-Vento Expert		Remote control
CD-1		CO2 sensor with LED CO2 indication and a sensor button for operation mode selection
CD-2		CO2 sensor