

SILEO V2

SILENT & ENERGY SAVING

Features



- Specially designed mixed-flow impeller profile ensures high air flow and low noise level.
- Casing and impeller are made of quality durable UV-resistant plastic.
- Backdraft damper for back flow prevention.
- The high ingress protection rating of IP45 makes the fan the ideal solution for the ventilation of bathrooms and shower rooms.
- The motor is mounted on special anti-vibration dampers.
- The exhaust pipe incorporates a specially designed air rectifier to reduce the air turbulence, increase pressure and lower the noise level.
- Ideal for intermittent or continuous ventilation.



Air flow:
up to 170 m³/h
47 l/s



Power:
from 4.5 W
SFP:
from 0.24 W/l/s



Noise level:
from 22 dBA



Options



Model	Sileo V2 100/125		
Option	S	T	H
Pull-cord switch	•		
Interval timer		•	
Turn-on delay timer		•	•
Turn-off delay timer		•	•
Humidity sensor			•

Turn-on delay timer

- Fixed turn-on delay time of 60 sec.

Turn-off delay timer

- Turn-off delay timer adjustable from 2 to 30 min.


Interval timer

- If the interval timer is enabled, the fan will turn on automatically each 6, 12 or 24 hours and it will operate from 2 to 30 min, depending of turn-off delay timer setting.

Humidity sensor

- Humidity setpoint adjustable from 60 % up to 90 %.

Overall dimensions

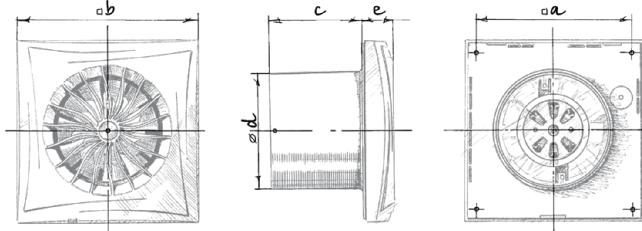

Dimensions [mm]	a	b	c	Ø d	e
Sileo V2 100	136	158	81	100	26
Sileo V2 125	168	182	91	124	27


Designation key

Sileo	V2	125	H
Model	Two-speed motor	Spigot diameter	Option

Technical data

Model	Sileo V2 100		Sileo V2 125	
	min	max	min	max
Voltage [V/Hz]			220-240/50(60)	
Power [W]	4.5	7	9.5	13.5
Current [A]	0.029	0.052	0.065	0.09
RPM [min ⁻¹]	1850	2400	1800	2250
Air flow [m ³ /h (l/s)]	60 (17)	90 (25)	145 (40)	170 (47)
SFP [W/l/s]	0.27	0.28	0.24	0.29
Sound pressure level [dBA]*	22	25	28	32

* Sound pressure level measured in free space at a distance of 3 meters from the fan.

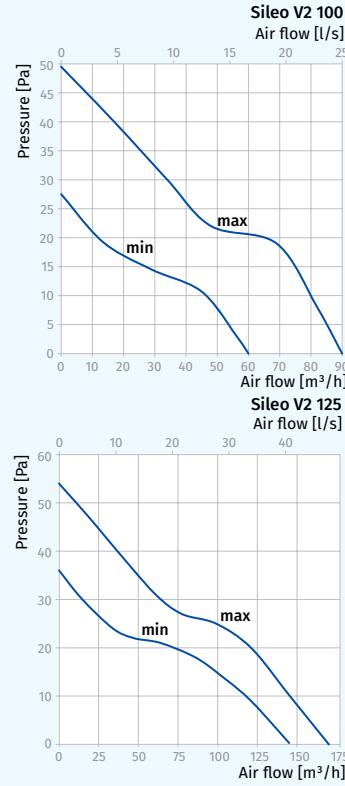

Accessories

Duct system	Flexible air ducts	Grilles and hoods	Speed controllers	Clamps