

# AERO STILL

SILENT & ENERGY SAVING

## Features



- Wall and ceiling mounting
- Low energy consumption and noise
- Easy maintenance
- Continuous operation
- Backdraft damper
- Ball bearing motor
- Available in chrome (Aero Chrome) and gold (Aero Gold) decorations
- 5 year warranty



**Air flow:**  
up to 254 m<sup>3</sup>/h  
71 l/s



**Power:**  
from 5.5 W  
**SFP:**  
from 0.21 W/l/s



**Noise level:**  
from 25 dBA



Gold



Chrome



Vintage


## Options




Model	Aero Still 100/125/150				
	S	T	ST	H	SH
Pull-cord switch	•		•		•
Timer		•	•	•	•
Humidity sensor				•	•

- Turn-off delay adjustable from 2 to 30 min.
- Humidity setpoint adjustable from 60 % up to 90 %.

## Overall dimensions and mounting

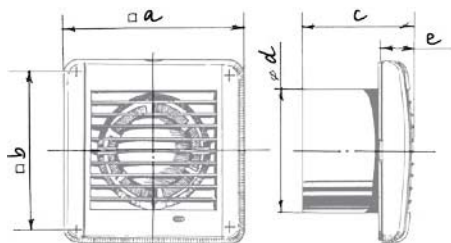


Dimensions [mm]	a	b	c	Ø d	e
Aero Still 100	144	122	92.5	100	29.5
Aero Still 125	168	144	97	125	30
Aero Still 150	198	170	119	150	30

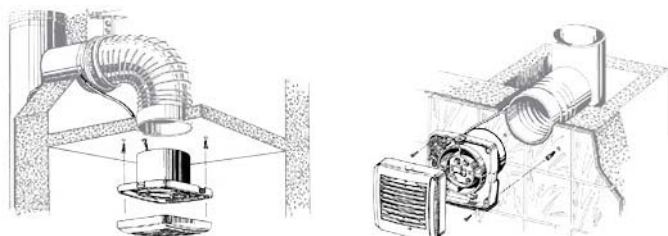

## Technical data

Model	Aero Still 100	Aero Still 125	Aero Still 150
Voltage [V/Hz]	220-240/50	220-240/50	220-240/50
Power [W]	5.5	9.4	19
Current [A]	0.035	0.059	0.14
Air flow [m <sup>3</sup> /h (l/s)]	84 (23)	158 (44)	254 (71)
SFP [W/l/s]	0.24	0.21	0.27
Noise level [dBA]	25	31	33



## Designation key

Aero	Still	Gold	125	SH
Model	Silent	Color	Spigot diameter	Option

## Accessories

### Duct system



BlauPlast

### Flexible air ducts



BlauFlex

### Grilles and hoods



Decor, GM

### Speed controllers



CDT E1.8

MCD 60/0.3

### Clamps



K, KZ